


Dielectric Fittings

Dielectric fittings isolate monitoring instruments from the effects of electrical current. Installed on impulse lines ahead of monitoring stations in natural gas pipelines, the fittings interrupt cathodic current flow while permitting full fluid flow.

Fitting design is unique in that it separates the two primary functions of electrical insulation and fluid containment.

Thermoplastic insulators provide high dielectric strength over a wide range of operating and climatic conditions.

A fluorocarbon FKM quad seal contained in the fitting provides the primary fluid seal.

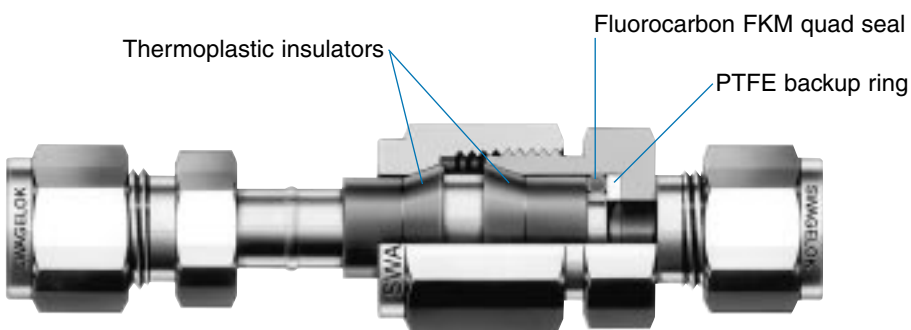

Features

- Metal components are machined from 316 stainless steel for use in rugged environments.
- Molded thermoplastic insulation with excellent electrical, chemical, and ultraviolet resistance and low water absorption maintains dielectric strength and integrity over a wide range of operating and climatic conditions.
- Gageable Swagelok tube fitting or tapered pipe thread end connections (NPT/BSP) provide direct connection to tubing or piping system.

Materials

Body: 316 stainless steel
 Insulators: Polyamide-imide
 Quad seal: 70 durometer fluorocarbon FKM
 Backup Ring: Virgin PTFE

Technical Data


Electrical Resistance of Insulators at 70°F (20°C):

$10 \times 10^6 \Omega$ at 10 V (dc)

Pressure Rating: 5000 psig (344 bar)

Temperature Rating: -40 to 200°F (-40 to 93°C)

Ordering Information/Dimensions

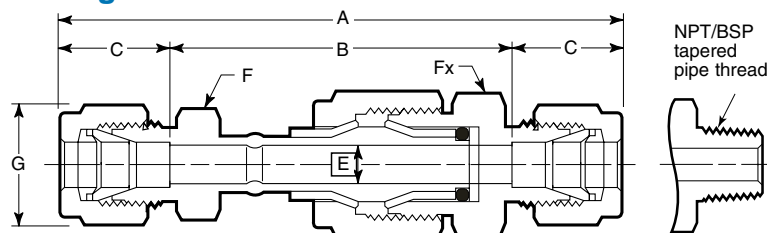

Caution: Do not disassemble the insulating connection. It must not be broken or used as a disconnection point.

End Connections			Dimensions, in. (mm)							
Type	Tube Size, in.	Pipe Size, in.	Ordering Number	A	B	C	E, Minimum Opening	F, Hex Flat	Fx, Hex Flat	G, Hex Flat
Swagelok tube fittings	1/4	—	SS-4-DE-6	3.77 (95.8)	2.57 (65.3)	0.60 (15.2)	0.28 (7.1)	1/2	13/16	9/16
	3/8	—	SS-6-DE-6	3.92 (99.6)	2.59 (65.8)	0.66 (16.8)		5/8		11/16
	1/2	—	SS-8-DE-6	4.17 (106)	2.37 (60.2)	0.90 (22.9)		13/16	7/8	
	12 mm	—	SS-12-MDE-6	4.23 (107)	2.43 (61.7)			22 mm		
Swagelok tube fittings to male NPT	3/8	1/4	SS-6-DE-1-4	3.73 (94.7)	—	0.66 (16.8)		5/8	7/8	11/16

Dimensions shown with Swagelok nuts finger-tight. Dimensions in inches and (millimeters) are for reference only, subject to change.

Safe Product Selection

When selecting a product, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user.

Caution: Do not mix or interchange parts with those of other manufacturers.