LOW-FLOW PRESSURE REGULATOR



• Gas Liquid

• Diaphragm • Piston





Non-Venting

Max Inlet: 414 bar (6,000 psi)

Max Outlet: 10 bar (145 psi)

Cv 0.06



INTRODUCING THE LF240...

The LF240 is a single-stage low-flow pressure regulator for gas applications with a large sensitive elastomeric diaphragm for accurate low pressure control.

With a solid disk seat design, the LF240 enables higher inlet pressures of up to 414 bar (6,000 psi). Lightweight and relatively compact, it is perfect for customers looking for a regulator with a smaller footprint.

SPECIFICATION

Max. Rated Inlet Pressure	414 bar (6,000 psi)
Outlet Ranges	Up to 10 bar (145 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	1.5kg (3.3lbs)

^{*} Pressure regulator rating may be limited by connection type, Cv and/or seat material

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	AISI 316/316L Stainless Steel
Body and Bonnet	(UNS S31600/S31603)
Main Valve Pin	AISI 316/316L Stainless Steel
	(UNS S31600/S31603)
Soft Seat	PEEK™ or PCTFE
Valve Spring	Inconel® X750
Diaphragm	PTFE-Lined Elastomeric
Handwheel	Nylon
O-Rings	FKM/FPM
Loading Spring	AISI 302 Stainless Steel (UNS S30200)
Filter	40 Microns

FEATURES AND BENEFITS

1 SOLID DISK SEAT DESIGN

Robust design enabling higher inlet pressures of up to 414 bar (6,000 psi).

2 LIGHTWEIGHT 7.... LIGHTWEIGHT AND

> Perfect for when installation space is restricted.

LOW DECAYING PRESSURE EFFECT

> Stable outlet pressure under varying inlet conditions.

PTFF-I INFD **DIAPHRAGM**

> Offers a good chemical resistance.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com



LOW-FLOW PRESSURE REGULATOR



• Gas Liquid

Diaphragm





Non-Venting


Max Inlet: 414 bar (6,000 psi)

Max Outlet: 10 bar (145 psi)

Cv 0.06

DRAWINGS AND INSTALLATION DIMENSIONS

Dimensions shown for 1/4" NPT option - please contact the office for additional connections options.

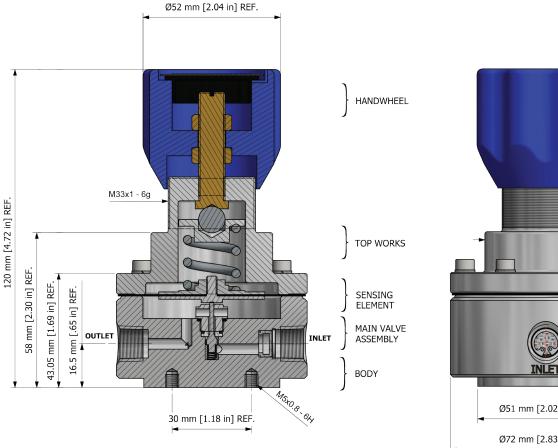



All gauge ports are 1/4" NPT as standard.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements



DESIGNED AND BUILT IN THE UK



LOW-FLOW PRESSURE REGULATOR



• Gas Liquid

• Diaphragm Piston





Non-Venting

Max Inlet: 414 bar (6,000 psi)


Max Outlet: 10 bar (145 psi)

Cv 0.06

FLOW CURVE

Please contact the office for further information.

PORTING CONFIGURATIONS

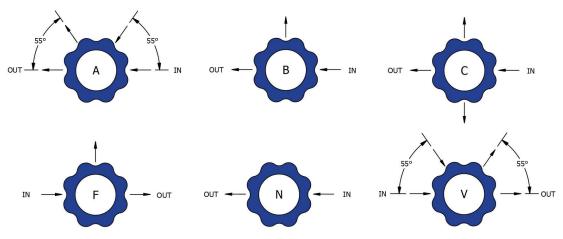

Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK



LOW-FLOW PRESSURE REGULATOR



• Gas Liquid

DiaphragmPiston



Non-Venting


Max Inlet: 414 bar (6,000 psi)

Max Outlet: 10 bar (145 psi)

Cv 0.06

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

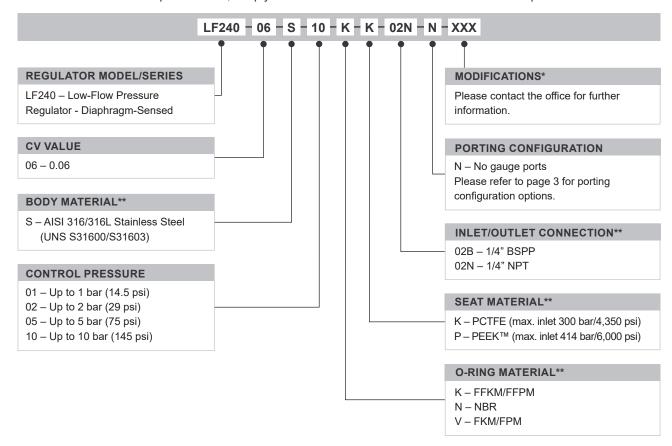

	PART NUMBER	DESCRIPTION
Service Kit	SRK-LF240	Various options available
Panel Mount Ring	PT-C-024	-

TRADEMARKS: Inconel® is a registered trademark of Inco Alloys International

PEEK™ is a trademark of Victrex PLC

- * Where applicable
- ** Other materials/connections may be available please contact the office

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E sales@pressure-tech.com

W www.pressure-tech.com

