LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

Image for illustration purposes only

DiaphragmPiston

Self-Venting

Non-Venting

Max Inlet: 414 bar (6,000 psi)

Max Outlet: 180 bar (2,610 psi)

Cv 0.06



## **INTRODUCING THE LF311...**

The LF311 is a single-stage piston-sensed pressure regulator for applications that require higher supply pressures in addition to an extended life cycle.

Based on the LF301, the LF311 also offers a 'solid disk' seat design which is more robust for aggressive or high temperature applications.

#### **SPECIFICATION**

Max. Rated Inlet Pressure	414 bar (6,000 psi)
Outlet Ranges	Up to 180 bar (2,610 psi)
Design Proof Pressure	150% max. working pressure
Seat Leakage	In accordance with ANSI/FCI 70-3
Weight	0.9kg (2lbs)

#### STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	AISI 316 / 316L Stainless Steel (UNS S31600 / S31603)
Main Valve Pin	AISI 316 / 316L Stainless Steel (UNS S31600 / S31603)
Soft Seat	PEEK™ or PCTFE
Valve Spring	Inconel® X750
Piston	AISI 316 / 316L Stainless Steel (UNS S31600 / S31603)
Handwheel	Nylon
'O'-Ring Seals	FKM / FPM
Loading Spring	AISI 302 Stainless Steel (UNS S30200)
Filter	40 Microns

#### **FEATURES AND BENEFITS**

1 PISTON PISTON SENSING

> Perfect for use in challenging conditions.

316SS THREADED 2 BONNET

> For panel mounting option as standard.

40 MICRON INLET **FILTER** 

> First stage soft seat protection from system contamination.

SOLID DISK SEAT DESIGN

Robust design enabling higher inlet pressures of up to 414 bar (6,000 psi).

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





### PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

T +44 (0)1457 899 307

E info@pressure-tech.com

W www.pressure-tech.com

LOW-FLOW PRESSURE REGULATOR



• Gas • Liquid

Diaphragm • Piston

Self-Venting


Non-Venting

Max Inlet: 414 bar (6,000 psi)

Max Outlet: 180 bar (2,610 psi)

Cv 0.06

### **DRAWINGS AND INSTALLATION DIMENSIONS**

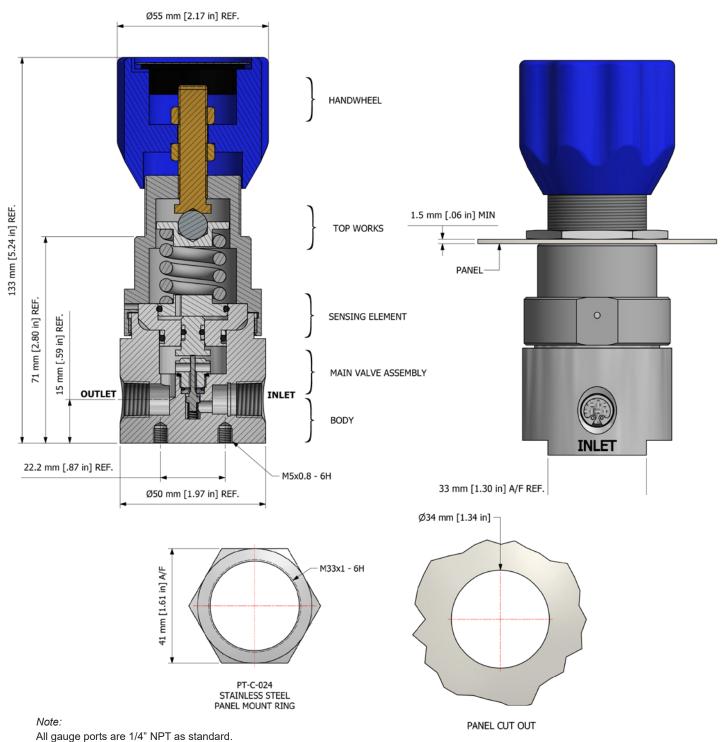

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.





#### PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

- T +44 (0)1457 899 307
- E info@pressure-tech.com
- W www.pressure-tech.com



LOW-FLOW PRESSURE REGULATOR













Max Inlet: 414 bar (6,000 psi)


Max Outlet: 180 bar (2,610 psi)

Cv 0.06

### **FLOW CURVE**

Please contact the office for further information.

#### **PORTING CONFIGURATIONS**

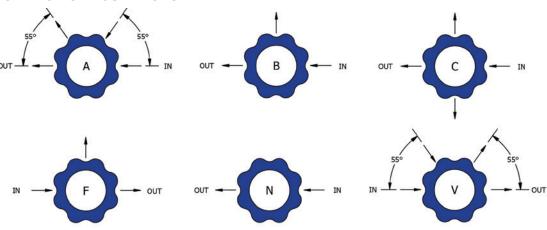

Note:

Additional porting configurations are available - please contact the office for further information.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



DESIGNED AND BUILT IN THE UK



LOW-FLOW PRESSURE REGULATOR














Max Inlet: 414 bar (6,000 psi)

Max Outlet: 180 bar (2,610 psi)

Cv 0.06

### **ORDERING INFORMATION**

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

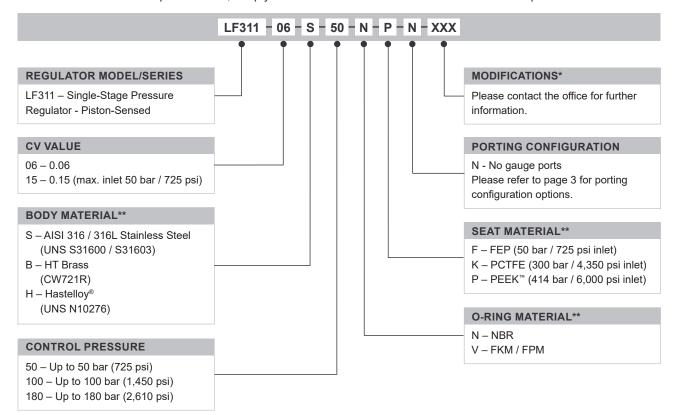

	PART NUMBER	DESCRIPTION
Service Kit	SRK-LF311	Various options available
Panel Mounting Ring	PT-C-024	-

TRADEMARKS: PEEK™ is a trademark of Victrex PLC

Inconel® is a registered trademark of Inco Alloys International Hastelloy® is a registered trademark of Haynes International, Inc

- \* Where applicable
- \*\* Other materials may be available please contact the office

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements





#### PRESSURE TECH LTD

Unit 24, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

- T +44 (0)1457 899 307
- E info@pressure-tech.com
- W www.pressure-tech.com

